

NXG-4-RF-Z

Centrale xGenConnect, 4 zones (16 Max.), 4 partitions, avec récepteurs Z-Wave et LoNa et IP intégré.

Security Literally made simple

As part of the UltraSync family of intrusion panels, the xGenConnect series offers a new standard for scalability, flexibility and backwards compatibility, enabling professional security installers to leverage a single platform for new installs as well as upgrading legacy installations with the latest technologies and home comfort.

The xGenConnect is a smart hybrid intrusion panel ideal for residential or light commercial security applications. With the ability to control up to 16 zones and 4 partitions by 40 users, it has the flexibility to meet the requirements of future security needs.

The on-board ethernet port allows a secure connection to the UltraSync Cloud, offering access to a wide range of services, including alarm reporting and remote connectivity.

An optional 4G & WiFi router plug-on module is available for backup or primary cellular connectivity to the UltraSync Cloud. At the same time, the 4G & WiFi module can connect to a customer's home router via a Wifi link. This avoids having to install an ethernet cable between the panel and the customer's router. The module also has an ethernet port in case the security system requires UltraSync cameras for video surveillance purposes.

As an option, the xGenConnect series offers Z-Wave® home automation allowing users to manually control Z-Wave lights, thermostats and locks via the UltraSync+ mobile application or have scenes defined in the panel to perform automated home control.

Migrate NetworX to xGenConnect

Legacy NetworX systems can easily be migrated to xGenConnect since the panel main board has the same form factor as the legacy NetworX panel. Apart from the 4-wire RS-485 xGen communication bus, xGenConnect also has the 3-wire NetworX communication bus on-board. Most of the NetworX peripherals such as keypads and zone expanders can be integrated seamlessly with xGenConnect, avoiding the need to replace the entire security system.


Easy to control and monitor

The xGenConnect security system can be controlled on-site from a traditional keypad and remotely via the UltraSync+ App.

A built-in web server allows the installer to access the system and perform advanced programming. The web server is accessible from a web browser on a computer, tablet or smartphone.

The UltraSync+ App allows the user to control the security system from an Apple® iPhone/iPad or Google Android device. The user can navigate through different screens allowing to arm/disarm partitions, enable or disable Chime, bypass zones, manage users, watch live or recorded images. The same App will allow the installer to perform the system programming.

Easy to program

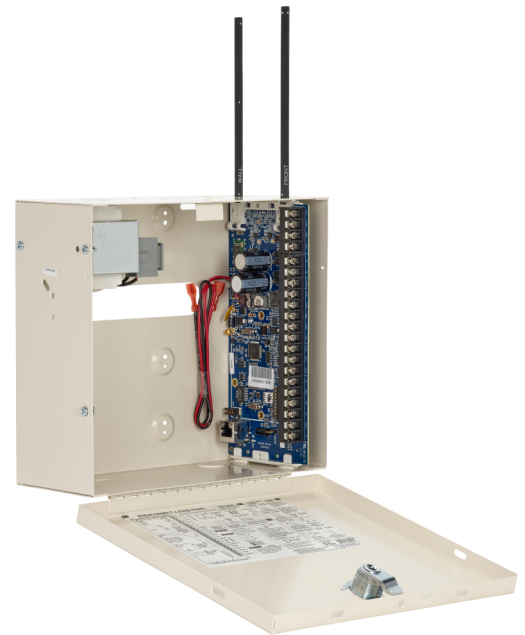

Details

- 4 zones on-board
- Maximum 16 zones (including wireless)
- Maximum 8 wireless keyfobs
- Legacy & LoNa 433MHz RF receiver on-board
- Multi-purpose keyed external antennas
- Maximum 4 partitions
- Maximum 40 users, each user with up to 4 profile levels
- Maximum 24 devices (expanders and keypads)
- Maximum 16 keypads
- xGen and NetworX communication bus
- Zone Doubling and multiple end-of-line resistor support
- UltraSync Video integration
- Z-Wave® Home Automation (future)
- 3 programmable outputs on-board
- Actions and Scenes programming logic
- 10/100Base-T IP/LAN connection
- Optional 4G/wifi and 4G plug-on module
- Built-in web server
- DLX900 programming software
- Supporting Osborne Hoffman alarm reporting in SIA and CID
- Firmware upgrade via USBUP-EUR-V2 or DLX900 over the network
- Auto-enroll feature
- Several diagnostic LEDs on-board
- EN50131-1/EN50131-3/EN50131-6 Grade 2 Class II, EN50136-2/EN50131-10 SP4 DP3, INCERT T031+A1

Once all system peripherals are wired up and enrolled by the xGenConnect system using the auto-enroll feature, the panel can be programmed from the local keypad, from a desktop PC connecting to the panel built-in web server or via the DLX900 management software.

The system can also be programmed via a smart phone or tablet over the secured UltraSync cloud service. Most of the panel menus have pre-programmed defaults. Simply select from the drop-down menu the most suitable option.

UltraSync+ App

An App is available for Apple iPhone/iPad and Google Android smart phones. It allows viewing the system status, offers system controls such as bypass zones, arm and disarm, read the event history, watch live or recorded images, control Z-Wave lights, thermostats and locks.

The user can receive push notifications from the App in case the system status changes or when there is an alarm or trouble condition. If enabled, the App Location Service monitors the location of the smart device (user) in reference to the geographical location of the panel. When the user enters or exits a fixed proximity from the protected premises, automated functions can be initiated such as switching off lights, receive a notification if the panel is armed or not.

The installer can use the App to perform advanced programming. The App guarantees a secure connection between your smart phone and the xGenConnect security system over WiFi or the cloud. The setup only requires to enter the unique serial number and access code in the App. The user and installer can log in using their user name and PIN code. No complicated port forwarding is required.

NXG-4-RF-Z

Centrale xGenConnect, 4 zones (16 Max.), 4 partitions, avec récepteurs Z-Wave et LoNa et IP intégré.

Spécifications techniques

Système

Type panneau	Hybride
--------------	---------

Entrées

Nbre max. d'entrées	16
Entrées embarquées	4

Sorties

Nbre de sorties embarquées	4
----------------------------	---

Zone

Nombre de zones	4
-----------------	---

Utilisateur/cartes

Nombre maximal d'utilisateurs	40
-------------------------------	----

Communication

Type de transmission embarquée	IP
Databus type	NetworX & xGen RS-485

Journal des événements

Journal des événements d'alarme	1024
---------------------------------	------

Électrique

Tension de fonctionnement	230 VAC +10%, -15%, 50 Hz ±10%
Valeur de l'alimentation	16.3 VAC 40 VA
Consommation de la carte mère	130 mA at 13.8 VDC +/- 0.4 V
Clients filaire maximum	2000 mA at 13.8 VDC +/- 0.4 V
Puissance d'alimentation Aux. maximum	13.8 VDC +/- 0.2 V, 1 A max.
Fusibles de réinitialisation automatique	Yes

Caractéristiques physiques

Dimensions physiques	394 x 256 x 118 mm (enclosure only) 359 x 256 x 118 mm (with external antennas)
Poids à l'expédition	1435 g
Couleur	Beige
Matériel	Métal
Boîtier	Petit métallique

Environnement

Température de fonctionnement	0 to +55°C
Humidité relative	95% non-condensing
Environnement	Intérieur
Classe environnementale	Class II

Normes & réglementation

EN50131 Grade	Grade 2
Conformité	CE
Certification	EN50131 Grade 2, INCERT

Electrical

Supported battery	BS127N: 7.2 Ah 12 V nominal
Wireless receiver	433 MHz Legacy + LoNa

System

Max no. of modules	24 (of which max 16 keypads)
--------------------	------------------------------

Inputs

2EOL resistor values	3.3 kΩ - 6.6 kΩ ; 4.7 kΩ - 9.4 kΩ ; 4.1 kΩ - 8.2 kΩ
Max no. of wireless transmitters	16 sensors + 8 keyfobs

En tant que société d'innovation, Carrier Fire & Security se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 7 June 2021 - 10:48

