

DC110


Poort/overheadcont., sabo.lus, 2 m kabel, afstand van 19-63mm, wisselcont.

Overhead Door Magnetic Contact

The DC110 overhead door magnetic contact is for use in the rigorous environments for commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

Easy Installation

A wide operating gap distance makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

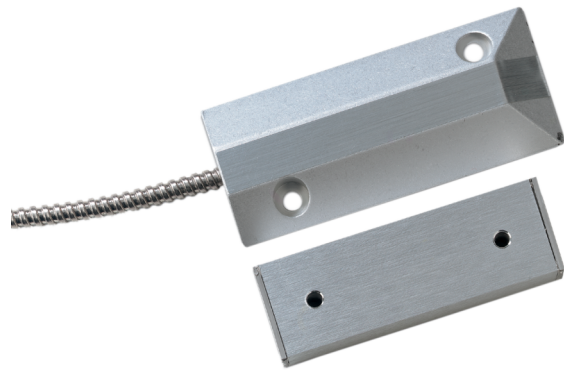

Details

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Small size less likely to be damaged by forlifts
- Tamper loop provided

DC110

Poort/overheadcont., sabo.lus, 2 m kabel, afstand van 19-63mm, wisselcont.

Technische specificaties

General


Application type	Surface Mount
Contact type	CO
Connectivity	5 wires, 2 m

Wired/wireless

Wired-wireless	Wired
----------------	-------

Physical

Material	Aluminium
Dimensions magnet	76 x 25 x 12 mm
Dimensions contact / sensor	88 x 38 x 11 mm
Operating gap	19-63 mm

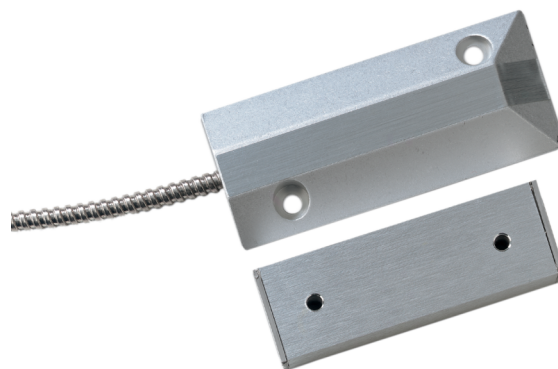

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

30 April 2019 - 13:08