




## NXG-001

### xGen plastic enclosure

A spare plastic enclosure is available for those installations where additional xGen zone and/or output expanders are required. The xGen NXG-001 plastic enclosure includes a DIN rail for mounting the expanders and a tamper switch. The cover of the enclosure can be removed by releasing the two screws using the supplied allen key. To install an expander module, release the locking tab(s) and place it on the DIN rail. Push the locking tab(s) to secure the expander module.

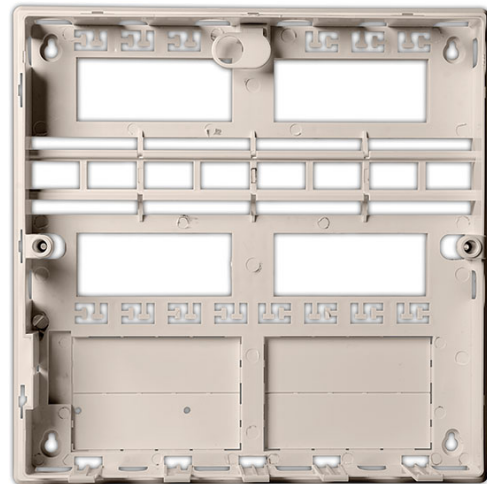

### Standard Features

- Up to 4 xGen expander modules can be installed
- Includes DIN-rail and tamper switch
- Removable cover
- Locked with 2 allen screws (with a hexagonal hole)

# NXG-001

## xGen plastic enclosure

### Specifications

|                           |                               |
|---------------------------|-------------------------------|
| Compatibility             | xGen CPU's and expanders      |
| Maximum number of modules |                               |
| with CPU                  | max 2 xGen expanders          |
| without CPU               | max 4 XGen expanders          |
| Tamper switch             | included (open and pry-off)   |
| Transformer               | not included                  |
| Battery                   | not included (max. 12Vdc/7Ah) |
| Operating temperature     | 0°C to 45°C                   |
| Dimensions (L x W x H)    | 371 x 371 x 118 mm            |
| Weight                    | 0.840 kg                      |

### Ordering Information

| Part No.  | Description                              |
|-----------|--|
| NXG-001   | xGen plastic enclosure                   |
| NXG-003   | xGen metal enclosure                     |
| NXG-003-X | Transformer 40VA for xGen control panels |

