

1044TW-N

Industrial surface mount magnetic contact, extra wide gap, white

Industrial Surface Mount Contact

The Sentrol 1045T series features a wider make distance, which permits faster installation, accommodates greater misalignment and works better on steel without time-consuming brackets. A wider break distance helps prevent false alarms caused by loose fitting doors. Sentrol-specified contacts keep the 1045 series from sticking or freezing on seldom-used doors.

Applications

The contacts are used to protect openings such as metal entry/exit doors, overhead doors, roof hatches or hinged skylights.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.



Details

- Designed for commercial and industrial applications
- Can be used on steel without brackets
- Rugged construction
- Mounting screws
- Concealed terminals resist tampering and inadvertent shorting

1044TW-N

Industrial surface mount magnetic contact, extra wide gap, white

Technische specificaties

General


Application type	Surface Mount
Contact type	SPDT
Connectivity	screws terminals

Wired/wireless

Wired-wireless	Wired
----------------	-------

Physical

Physical dimensions	99 x 15 x 18 mm
Colour	White
Operating gap	76 mm (max.)

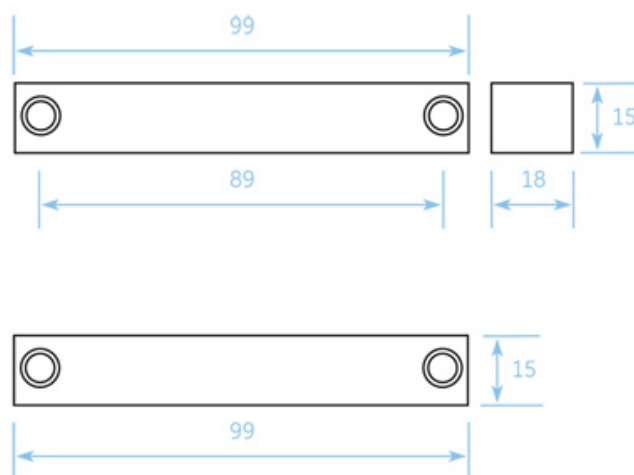

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 26 February 2021 - 9:39

