

Keypad - surface mounted - INOX housing - backlit metal keys - RS485 local bus output



Codification and designation :

DA-4067 : Keypad - surface mounted - INOX housing - backlit metal keys - RS485 local bus output

General description :

This robust keypad can be either installed outside or inside. It is available in a metal housing, allowing to a surface mounting. It comes with a RS-485 local bus and a backlight keypad. Its LEDs, tamper and buzzer are managed directly by the WS4.

Technical characteristics :


- Mounting: Surface
- Housing: Steel A304
- Colours: Brushed steel
- Technology: Keypad
- Keys: Backlit metal
- Output: Local bus RS-485
- Visible signal: 2 free tension LEDs (Red & Green) - managed by the host
- Audible signal: 1 buzzer - managed by the host
- Tamper protection: Yes, managed by the host
- Voltage: 9-14 V DC
- Consumption: Standby: 5 mA
- Max: 30 mA

MECHANICAL CHARACTERISTICS

- IP rating: IP65
- Dimensions (L x H x W): 113,24 x 91 x 49.03 mm
- Weight: ~0.6 kg
- Operating temperature: -20°C to +50°C
- Operating humidity: 0 to 95% (non-condensing)

Keypad - surface mounted - INOX housing - backlit metal keys - RS485 local bus output

Mechanical dimensions and weight :

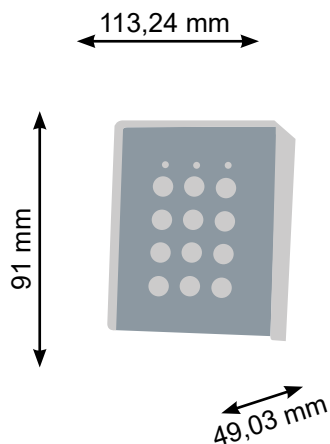

Material : Stainless steel

Weight : ~0,3 kg

Wiring :



+12 VDC

RS485 +

RS485 -

GND

Other versions :

No other version

Package :

Delivered with wiring plan



Rue de la Gare,30
B-1420 Braine-l'Alleud
Belgium
Tel : +32 (0)2 389 16 40
Fax : +32 (0)2 387 14 02
contact@dinec.be
www.dinec.be

Your distributor :

